



## Wire to PCB Connector for IP00 Stripes

ARTICLE NO. 15-5280-527

Connector with IP 20 protection

### PRODUCT FEATURES


- Shell: Polycarbonate
- Application for LED-Stripes with 8mm Width
- For LED-Stripes with a thickness of 0.25 – 0.35mm

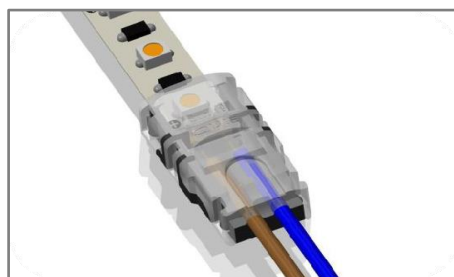


### INFOMATIVE DATA

Rated Current	5 A
Rated Voltage	0-36 V
Working Temperature	-20 °C ~ 50 °C
Temperature Resistance (Shell)	105 °C
Flame Rating	UL-94-V0
Wire Size	0.35 mm <sup>2</sup> ~ 0.75 mm <sup>2</sup>
LEDs per Meter	30 – 120


## CONNECTING WIRE TO PCB

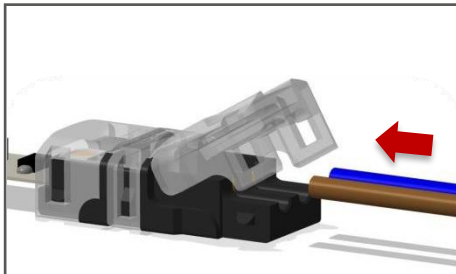


Insert the wires

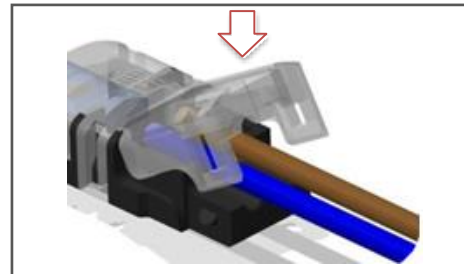


Close the cover

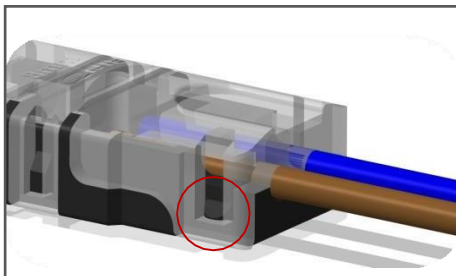

You will hear a "click sound" after you press the cover into the locking system

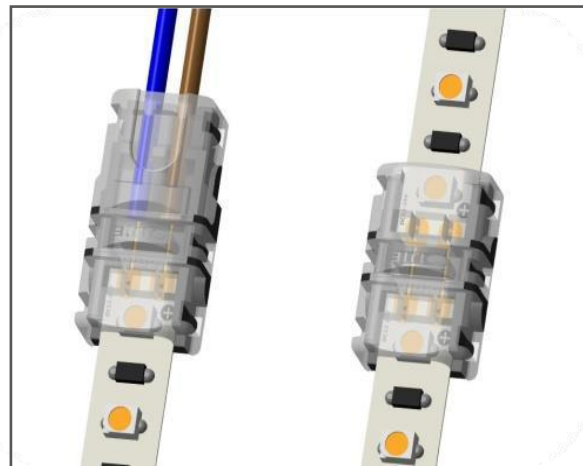

## PRODUCT DRAWING

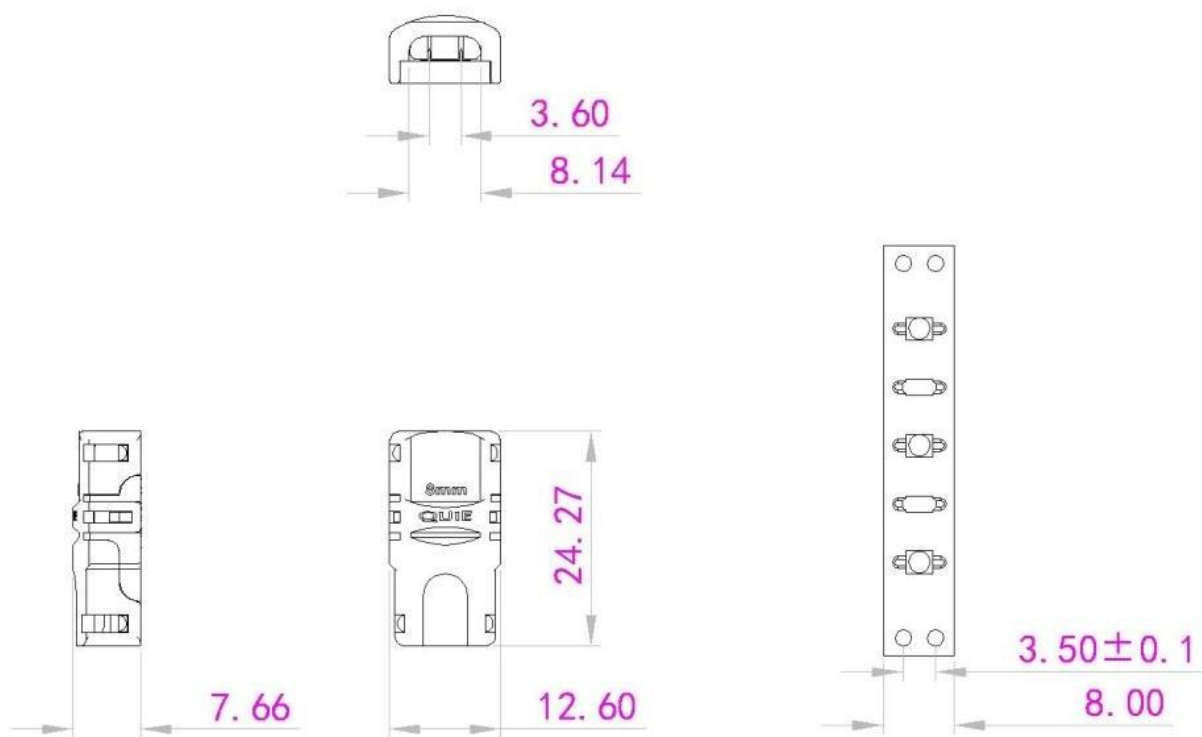

These data can have a tolerance value of  $\pm 15\%$ . Typing and printing errors reserved.

Revision: 3 \ 02/2021 \ page 3/3